

Toroidal Type TCR




特長

- For Reducing Radiated, Conducted Emission for Inverter, UPS and NC Controlled Equipment
- Useful to make CISPR, FCC, EN etc. compliant
- Large Ferrite Core is enclosed in a PBT (UL94-VO) resin case
- Reduce noise just attaching the coil (TCR)

仕様

Model	Impedance					
	1Coil		5Coil		10Coil	
	150 kHz	1 MHz	150 Hz	1 MHz	150 Hz	1 MHz
TCR47	9 Ω	25 Ω	210 Ω	630 Ω	870 Ω	2500 Ω
TCR60	8 Ω	21 Ω	190 Ω	540 Ω	780 Ω	2150 Ω
TCR78	8 Ω	22 Ω	200 Ω	560 Ω	800 Ω	2270 Ω
TCR96	6 Ω	14 Ω	140 Ω	330 Ω	570 Ω	1330 Ω
TCR128	6 Ω	12 Ω	150 Ω	300 Ω	590 Ω	1190 Ω

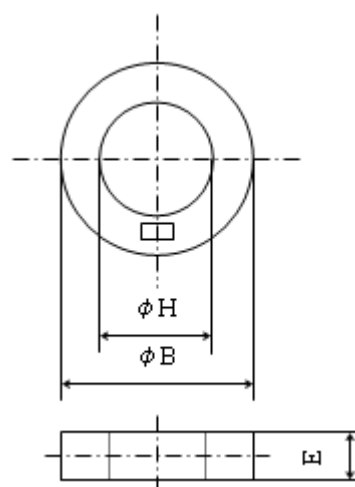

Above impedance values are approximate.

Type	Outside Dimension[mm]			Price
	B	E	H	
TCR47	51	18.5	23.5	TBD
TCR60	65	22	35	TBD
TCR78	83	26	46.5	TBD
TCR96	101.5	28	70.5	TBD
TCR128	135	37	99.5	TBD

- Specifications are subject to change without notice due to improvement
- SunJEM will design products to meet your individual requirements. Please feel free to consult with us for products other than ready-made ones.